


3 x 5 RULE-PLAN VIEW

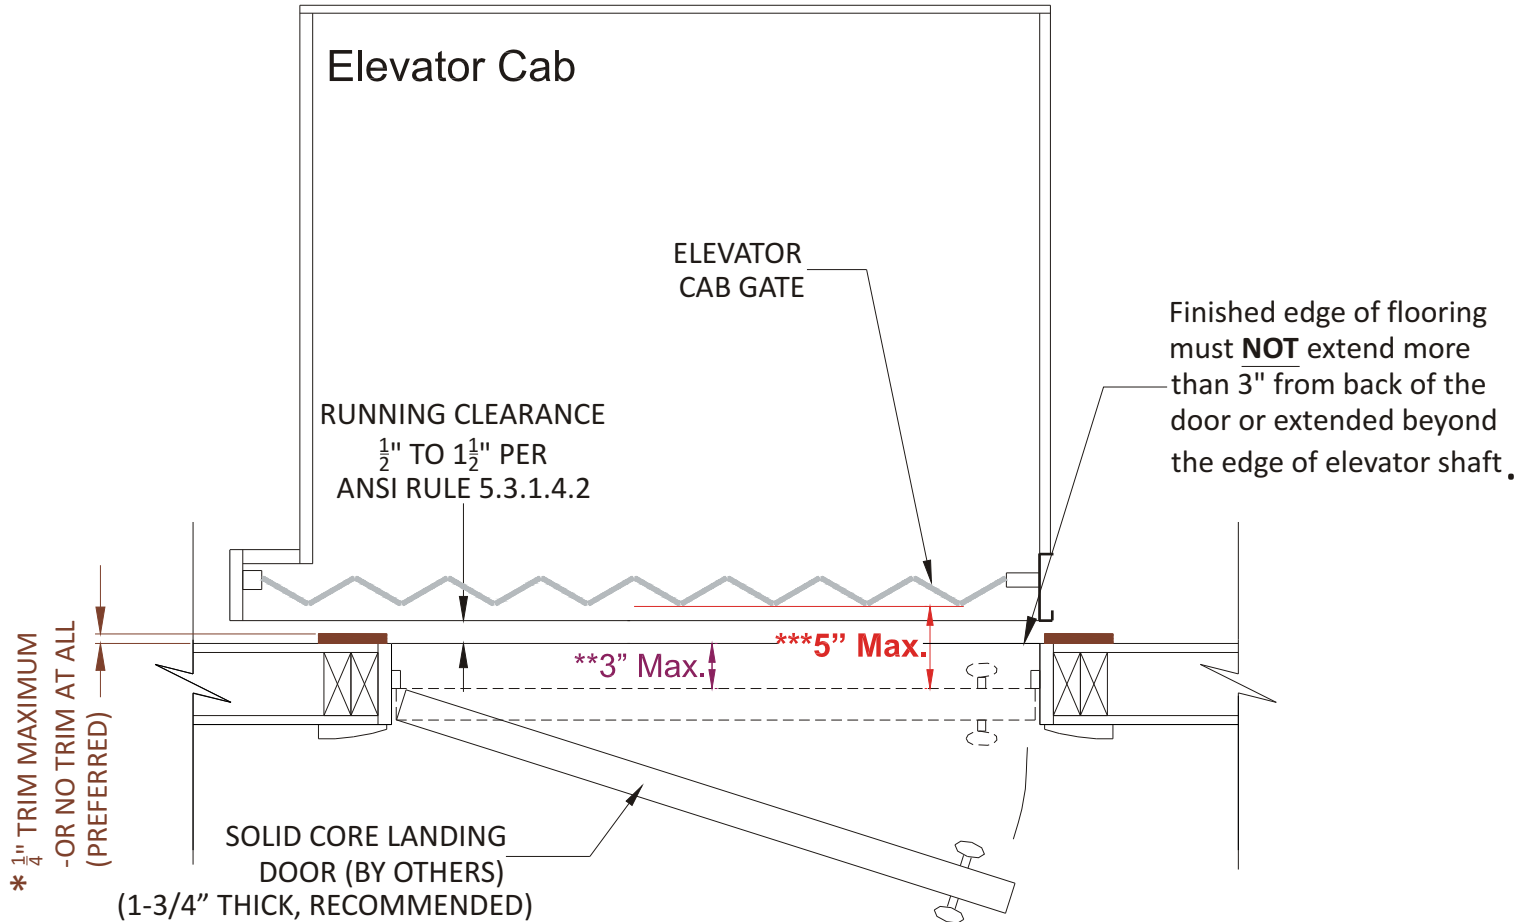

* $\frac{1}{4}$ " TRIM (OR NO TRIM AT ALL) DO NOT INSTALL CONVENTIONAL DOOR CASING TRIM.

** FLOORING MUST **NOT** EXTEND MORE THAN 3" BEYOND THE ELEVATOR SHAFT FACE OF THE LANDING DOOR (IN CLOSED POSITION).

*** DISTANCE FROM THE ELEVATOR SHAFT FACE OF THE LANDING DOOR (CLOSED POSITION) AND THE CAR DOOR/GATE SHALL **NOT** EXCEED 5".

ASME A17.1-2000, Rule 5.3.1.7.2

The clearance between the landing door (closed position) and the hoistway edge of the landing sill (flooring) shall not exceed 3". The distance between the hoistway face of the landing door (closed position) and the car door or gate shall not exceed 5".

SIGNATURE OF ACKNOWLEDGMENT

DATE